


NOTES:
 1. ALL CABLE 100% TEST, OPEN, SHORT, MISS WIRE
 2. RESISTANCE: 2 ohm max
 3. RESISTANCE: 20M ohm min
 4. HI-POT: 350V DC/3SEC
 5. DIMENSIONS MARK "▼" SHOULD BE CHECKED
 6. 成型內模後須包銅箔並進行360°環焊

WIRE CONNECTION

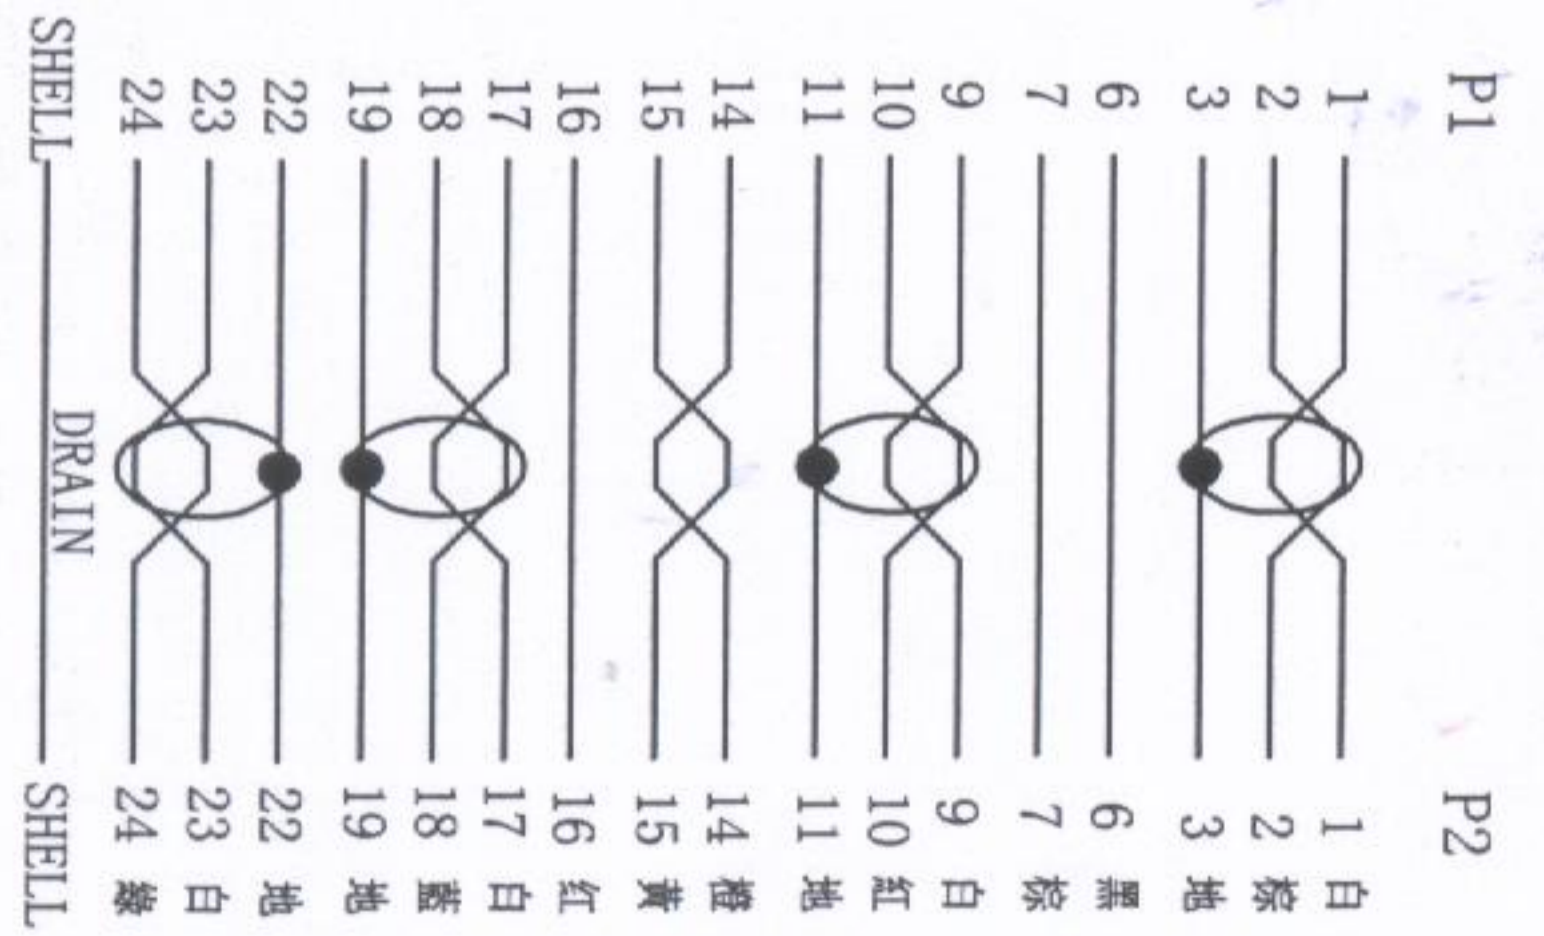

NO.	PART NO.	DESCRIPTION	Q'TY	UNIT
⑨	DUST CAP	DUST CAP:COLOR WHITE	2	PCS
⑧	H.S.T	黑色熱縮套管 Ø0.7*18MM	8	PCS
⑦	H.S.T	黑色熱縮套管 Ø1.5*8MM	8	PCS
⑥	銅箔	28*65MM	2	PCS
⑤	INNER MOLDING	PE	0.020	KG
④	OVER MOLDING	PVC 50 COLOR:WHITE	0.055	KG
③	SCREW	4.75*9.0mm 4#40 NI COLOR:WHITE	4	PCS
②	DVI CONN	DVI 18+1PIN MALE SOLDER TYPE CONTACT GOLD FLASH INSULATOR COLOR:BLACK INCKEL PLATED SHELL	2	PCS
①	CABLE	UL20276 30AWG*4P+28AWG*5C+AEB JACKET COLOR:BLACK OD:6.0	1800	mm

項目	設 變 內 容	日 期
ITEM	DESCRIPTION	DATE
①		
②		
③		


坤紀企業股份有限公司
 COMPONENT USER
 CP. User
 LTD
 INDUSTRY CO.,

繪圖者	一般公差	比例	NOVE	圖名
DRAW BY	X.X±	SCALE		DESCRIPTION
MICHELLE郭				DVI CABLE ASSY
核對者	單位	舊圖號		圖號
CHECK BY	UNIT	舊料號		DVG. NO
日期	mm	儲位		料號
DATE		CHP (NND)		BDM. NO
2008.3.05			D: \	頁數
				PAGE
				1/1
				版次
				REV (NND)
				x1