


ROHS COMPLIANT

ELECTRONIC TEST:
 1. ALL CABLE 100% TEST, OPEN, SHORT, MISS WIRE
 2. RESISTANCE: 1.0 ohm max
 3.1. RESISTANCE: 5M ohm min
 4. HI-POT: 300V DC/10ms
 5. DIMENSIONS MARK "▼" SHOULD BE CHECKED;

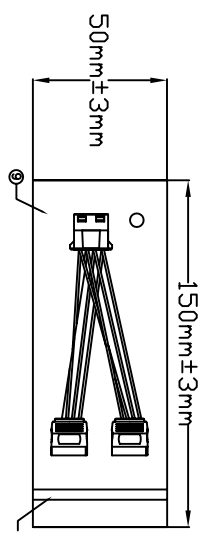

| | | | | |
|---|---------------|---------------------------------|-------|-----|
| ⑨ | 6083-1550-206 | PELL150*W50*0.06mm | 1 | Pcs |
| ⑧ | 6101-4500-000 | 45P PVC BLACK | 0.005 | KG |
| ⑦ | 6100-0019-000 | PE | 0.002 | KG |
| ⑥ | GSS30-1502-00 | S-ATA-15P .BLACK MOLDING 1U" | 2 | Pcs |
| ⑤ | 6011-2234-041 | UL1007 22AWG RED 265mm 285mm | 2 | Pcs |
| ④ | 6011-2234-001 | UL1007 22AWG BLACK 265mm 285mm | 4 | Pcs |
| ③ | 6011-2234-021 | UL1007 22AWG YELLOW 265mm 285mm | 2 | Pcs |
| ② | 6055-0711-023 | JMT CONTACT NI PLATED FEMALE | 4 | Pcs |
| ① | 6008-1104-112 | POWER-4P MALE, WHITE | 1 | Pc |

| | | | | |
|-----|----------|-------------|------|------|
| NO. | PART NO. | DESCRIPTION | Q'TY | UNIT |
|-----|----------|-------------|------|------|

| | | |
|------|-------------|------|
| 項目 | 變更內容 | 日期 |
| ITEM | DESCRIPTION | DATE |

| | | |
|---|--|--|
| ① | | |
| ② | | |
| ③ | | |

坤紀企業股份有限公司

COMPONENT USER INDUSTRY CO., LTD

| | | | | | |
|-------------|-----------|----------|------|-------------|-----------------|
| 繪圖者 | MICHELLE郭 | 比例 | NOVE | 圖名 | SATA 15P-4PIN |
| DRAW BY | | SCALE | | DESCRIPTION | L=260mm / 240mm |
| 核對者 | X. X± | 舊圖號 | | 圖號 | CSP-15PC2B4PM |
| CHECK BY | | 舊料號 | | DWG. NO | |
| 核准者 | | 單位 | mm | 料號 | 84010033R |
| APPROVED BY | | 單位 | | BDM. NO | |
| 日期 | 06.11.27 | 備位 | D:\ | 頁數 | 1/1 |
| DATE | | CHP (NO) | | PAGE | |
| | | | | 版次 | 2.0 |
| | | | | REV (NO) | |