



1. ELECTRICAL:
- 1.1 100% CONTINUITY TEST
 - 1.2 INSULATION RESISTANCE: 10 MEGA OHMS MIN.
 - 1.3 HI-POT: DC300V/0.01S
 - 1.4 CONTACT RESISTANCE: 2.0 OHMS MAX.

接點:

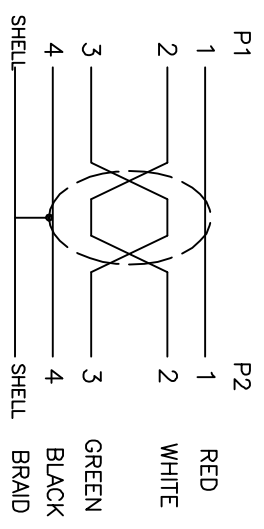

④	USB CONN	USB A TYPE FEMALE WHITE PIN GOLD PLATED G/F	1	PC
③	OVER MOLDING	45P PVC COLOR:BLACK	A/R	kg
②	USB CABLE	USB2.0 2725 28#/1P+24#/2C+4AB OD=4.5MM BLACK	1000	mm
①	USB CONN	USB A TYPE MALE WHITE PIN GOLD PLATED G/F LONG SOLDER TYPE	1	Set

項目	設 變 內 容	DESCRIPTION	日期
①			DATE
②			
③			


坤紀企業股份有限公司
 CP. User
 COMPONENT USER INDUSTRY CO., LTD

繪圖者 DRAW BY	MCHELL郭	一般公差 X.X±0.3	比例 SCALE	NOVE	圖名 DESCRIPTION	USB AM TO USB AF CABLE ASS'Y
核對者 CHECK BY		單位 UNIT	圖號 DVG. NO		圖號 DVG. NO	9708015
核准者 APPROVED BY		儲位 CMP. QND	儲位 SCALE	D:\	料號 BDM. NO	
日期 DATE	2008.8.22				頁數 PAGE	1/1
					版次 REV. QND	2.0

QP-F-01-8