


接點:

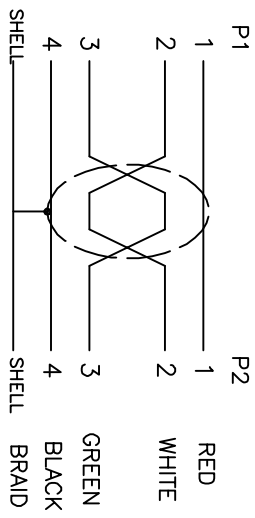

1. ELECTRICAL:

- 1.1 100% CONTINUITY TEST
- 1.2 INSULATION RESISTANCE: 10 MEGA OHMS MIN.
- 1.3 HI-POT: DC300V/0.01S
- 1.4 CONTACT RESISTANCE: 2.0 OHMS MAX.

④	OUTER MOLD	45P PVC COLOR:BLACK	A/R	9
③	USB CONN	USB A TYPE MALE WHITE PIN GOLD PLATED G/F LONG SOLDER TYPE	1	Set
②	USB CABLE	USB2.0 2725 28#/1P+24#/2C+4AB OD=4.5MM BLACK	2000	mm
①	USB CONN	USB B TYPE MALE WHITE PIN GOLD PLATED G/F LONG SOLDER TYPE	1	Set

項目	變更內容	DESCRIPTION	日期	DESCRIPTION	Q'TY	UNIT
①						
②						
③						

繪圖者 DRAW BY	MCHELL郭	一般公差 X.X±0.3	比例 SCALE	NOVE	圖名 DESCRIPTION	USB AM TO USB BM CABLE ASSY
核對者 CHECK BY		單位 UNIT	圖號 DWG. NO		圖號 Dwg. No	9708015
核准者 APPROVED BY		mm	舊料號		料號 BDM. NO	
日期 DATE	2008.8.22	儲位 CMP. QND	儲位 D:\		頁數 PAGE	1/1
					版次 REV. QND	2.0

