


**ELECTRONIC TEST:**

1. ALL CABLE 100% TEST, OPEN , SHORT, MISSWIRE
2. CONDUCTANCE RESISTANCE: 5 ohm
3. INSULATION RESISTANCE: 10M ohm AT DC 300V.
4. DIMENSIONS MARK " " SHOULD BE CHECKED; Pin Assignment

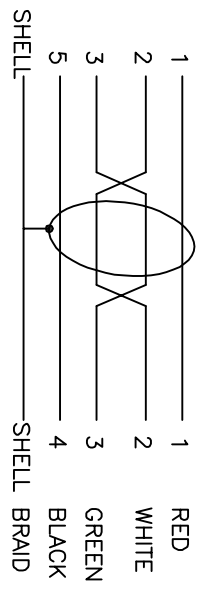

④	OVER MOLDING	45P PVC COLOR: BLACK	0.009	KG
③	USB CONNECTOR	USB A SOLDER TYPE MALE INSULATION COLOR: WHITE (SHORT TYPE)	1	set
②	MINI USB CONNECTOR	MINI USB B 5P TYPE INSULATION COLOR: BLACK SHORT TYPE MALE	1	set
①	USB CABLE	USB 2.0 CABLE 28AWG*1P+26AWG*2C+AEB JACKET COLOR: BLACK OD: 3.8mm	1270	mm

NO.		PART NO.		DESCRIPTION		Q'TY	UNIT
項目		設 變 內 容		DESCRIPTION		日期	DATE
項目		設 變 內 容		DESCRIPTION		日期	DATE
項目		設 變 內 容		DESCRIPTION		日期	DATE

坤紀企業股份有限公司  
 CP. User COMPONENT USER  
 LTD INDUSTRY CO.,

繪圖者 DRAW BY	MICHELL郭	一般公差 X.X±0.3	比例 SCALE	NOVE	圖名 DESCRIPTION	USB AM/MINI USB CABLE ASS'Y
核對者 CHECK BY		單位 UNIT	備圖號		圖號 DVG. NO	9704006
核准者 APPROVED BY		mm	舊料號		料號 BDM. NO	
日期 DATE	2008.4.08	儲位 CMP. NND	D: \	頁數 PAGE	1/1	版次 REV. (NND)
						2.0