


1. ELECTRICAL:
- 1.1 100% CONTINUITY TEST
 - 1.2 INSULATION RESISTANCE: 10 MEGA OHMS MIN.
 - 1.3 HI-POT: DC300V/0.01S
 - 1.4 CONTACT RESISTANCE: 2.0 OHMS MAX.

③	INNER MOLDING	LD-PE	A/R	9
④	OVER MOLDING	4SP PVC COLOR:BLACK	A/R	9
③	USB CONN	USB AM2.0 WHITE , GOLD PLATED G/F:SHELL PLATED NICKEL/SOLDER TYPE	1	set
②	USB CABLE	USB2.0 2725 28#/1P+28#/2C+4AB OD=3.8MM BLACK	A/R	mm
①	Micro USB CONN	MicroUSB BM BLACK PIN GOLD PLATED G/F, SHELL PLATED NICKEL SOLDER TYPE	1	PCS

NO.	PART NO.	DESCRIPTION	Q'TY	UNIT
DESCRIPTION				

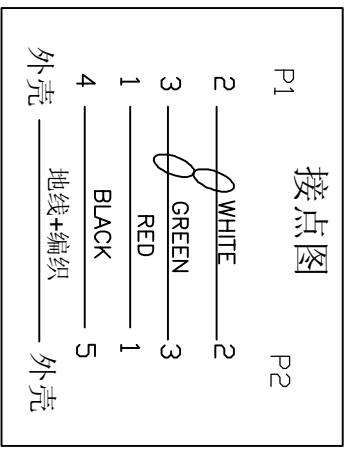

項目	變更內容	DESCRIPTION	日期
ITEM			DATE
①			
②			
③			

繪圖者: Ri cky
 核對者: X.X±0.3
 批准者: mm
 日期: 2009.12.10

一般公差: X.X±0.3
 單位: mm

比例: NOVE
 圖名: USB AM TO Micro USB BM CABLE ASS'Y
 圖號: 9812006
 料號: BDM ND
 頁數: 1/1
 版次: 1.0

CP. User 坤紀企業股份有限公司
 COMPONENT USER INDUSTRY CO., LTD